
Inductive sensor

BES M08MH1-PSC20B-S04G **BES0028**



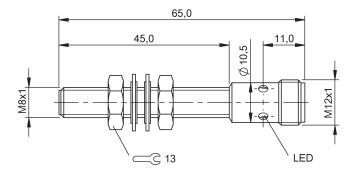


- PNP
- Normally open (NO) 2.00 mm
- Flush (shielded) Connector, M12x1-S04

General attributes Approvals / Conformity

Basic standard Enclosure Type per IEC 60529 Function indicator Operating distance marking Polarity reversal protected Power indicator Short circuit protected Trademark MTTF

Electrical attributes Connection type Eff. operating current le Eff. operating voltage Ue DC Electrical version Load capacitance max. (at Ue) Max. no-load cur. lo undamped Minimum operating current Im No-load current lo damped max. Operating voltage UB max. DC [V] Operating voltage UB min. DC [V] Rated insulation voltage Ui Rated short circuit current Ripple max. (% of Ue) Switching freq. f max. (at Ue) Switching function



CE cULus EAC IEC 60947-5-2 IP67 Yes ... Yes No Yes GLOBAL 880 a

Connector 200 mA 24.0 V DC, direct current 1.000 µF 5.0 mÅ 0 mA 10.0 mA 30 0 V 12.0 V 75 VDC 100 A 15 % 700 Hz Normally open (NO)







Switching output Voltage drop static max.

Mechanical attributes

Ambient temperature Ta max. Ambient temperature Ta min. Assured operating distance Sa Connector type Depth Diameter d1 Eff. operating distance Sr Housing material Mech. installation condition Mounting length Rated operating distance Sn [mm] Sensing face material Surface protection Tightening torque

M08x1 2.00 mm CuZn Flush (shielded) 45.0 mm 2.00 mm PA 12

3 Nm

EHI

PNP

2.5 V

70 °C -25 °C

1.60 mm

65.0 mm

M12x1-S04

Nickel-plated

Remarks

Embeddable: See installation notes for inductive sensors with extended switching distance 825357.

The sensor is functional again after the overload has been eliminated.

For further information on MTTF/B10d, please refer to the MTTF / B10d Certificate.

Specification of the MTTF value and the B10d value do not represent any binding quality and/or life expectancy guarantees.



www.balluff.com +49 (0) 7158 173-0, 173-370 1-800-543-8390 +86 (0) 21-50 644131

For definitions of terms, see main catalog Subject to change