


Jack Cat.6A STP

Part no: 13376

E-no: E5147149

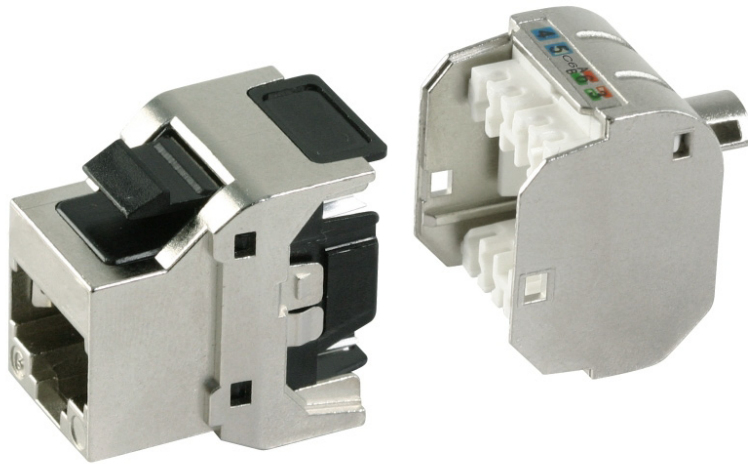

■ Specification:

Qualified Screened Class E_A/Category 6A

Permanent Link and Channel of ANSI/TIA-568-C.2

IEC 60603-7-51

ISO/IEC 11801 2nd edition

Cenelec EN 50173-1

■ Electrical:

Current Rating: 1.5 Amps

Insulation Resistance: 500 Mohms Minimum

Contact Resistance: 20 mohms Maximum

DC Resistance: 0.1 ohms Maximum

■ Mechanical:

Plug Insertion Life: 750 Cycles Minimum

Plug & Jack Contact Force: 100 Grams Minimum

Using FCC-Approved Plug

Plug Retention Force: 30 lbs Minimum

Temperature: -40° to 150°F (-40°C to 68°C)

■ Physicals:

Housing & Cap: Zinc Alloy Die-Casting

Cover & holder: High Impact Flame Retardant Plastic,

UL 94V-0 Rated

Springshielded: 0.25 Thickness SUS301

PCB: FR4, 1.6mm Thickness

Jack Wiring: 0.42mm Thickness Phosphor Bronze

Gold Over Nickel Plating

Connector: Insulation Displacement Connector

(IDC) Accept #23~26 AWG Solid Wire