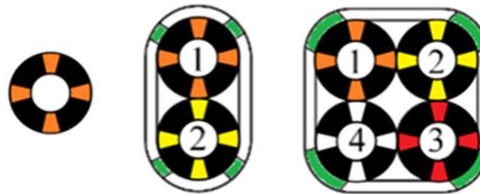


**FibreFlow™ Generic Specification  
DB metal-free (20/14)**


Sheath and duct colours for illustration only, to be defined at order placement.

**GENERIC DETAILS: SINGLE DUCT (at 20°C):**

Primary m/d outer diameter, nom	mm	20.0
Primary m/d, ribbed, inner diameter, nom	mm	14.0
primary m/d - mass, nominal	g/m	153
Min bend radius of primary m/d*	mm	13D**
Max pull tension, single m/d	N (kg)	1400 (140)
Duct material	-	HDPE

\*This radius relates to the duct capability only and does not indicate a suitable radius for blowing.

\*\*Where D is the diameter in the bending direction.

1. These ducts are compatible with designated 20mm push-fit connectors.
2. Max air pressure for blowing: 15bar.
3. Nominal sheath thickness of 1.1mm.

**PRODUCT-SPECIFIC DETAILS (all nominal)**

type	OD nom mm	Mass, Nom, g/m	Min bend radius mm	Max pull tension*
single	20mm	153	13D	1400N / 140kg
2DBmf	42.2 x 22.2mm	417	18D	3.75kN / 375kg
4DBmf	50.5mm across corners	765	20D	7kN / 700kg

\*After applying pulling tensions, allow time for the pulled product to relax. See instruction manuals

Sheath Removal: Longitudinal sheath strippers can also be used to strip the sheath

Radius for blowing: Recommend 1m radius or more (blowing mini-cable)(No smaller than 0.5m radius)

This document is intended as a guide only. Whilst the information it contains is believed to be correct, Emtelle can take no responsibility for actions taken based on the information contained in this document. Emtelle reserves the right to make changes to this document without notice. All sales of product are subject to Emtelle's terms and conditions of sale only, which can be found on Emtelle's website.

This document is protected by copyright (c) Emtelle UK Limited [2015]. The products depicted are protected by intellectual property rights. Any unauthorized copying of this document or of our products is prohibited and Emtelle UK Limited will take action to prevent any infringement of its rights and to claim damages for the loss that it suffers.

**ASSEMBLY TESTS:**

- |                      |                                |                          |
|----------------------|--------------------------------|--------------------------|
| 1. Crush test:       | test method IEC 60794-1-2-E3:  | Procedure to IEC 60794-5 |
| 2. Impact test:      | test method IEC 60794-1-2-E4:  | Procedure to IEC 60794-5 |
| 3. Kink test:        | test method IEC 60794-1-2-E10: | Procedure to IEC 60794-5 |
| 3. Flexibility test: | test method IEC 60794-1-2-E11: | Procedure to IEC 60794-5 |

Temperature range:	Operating	-30°C to +60°C
	Transport/Storage	-30°C to +70°C
	Installation	-10°C to +40°C

This document is intended as a guide only. Whilst the information it contains is believed to be correct, Emtelle can take no responsibility for actions taken based on the information contained in this document. Emtelle reserves the right to make changes to this document without notice. All sales of product are subject to Emtelle's terms and conditions of sale only, which can be found on Emtelle's website.

This document is protected by copyright (c) Emtelle UK Limited [2015]. The products depicted are protected by intellectual property rights. Any unauthorized copying of this document or of our products is prohibited and Emtelle UK Limited will take action to prevent any infringement of its rights and to claim damages for the loss that it suffers.

[www.emtelle.com](http://www.emtelle.com)