




DESIGNLIGHT

SCANDINAVIAN AB

Artikel nr.: Q-15MW MW E-nr 74 675 58

Material: Aluminium


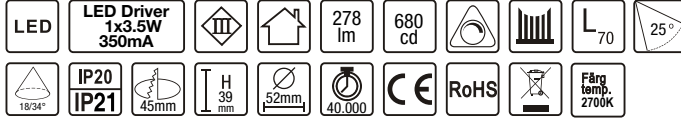


- Dimbar med 350 mA driver
- 79 lm/w med lins, driver
- 99 lm/w utan lins, driver
- CRI Värdet > 85

- Dimmable with 350 mA driver
- 79 lm/w with lens, driver
- 99 lm/w without lens, driver
- CRI Value > 85




Ljusfördelningskurva | Light distribution curve (Unit: Cd)

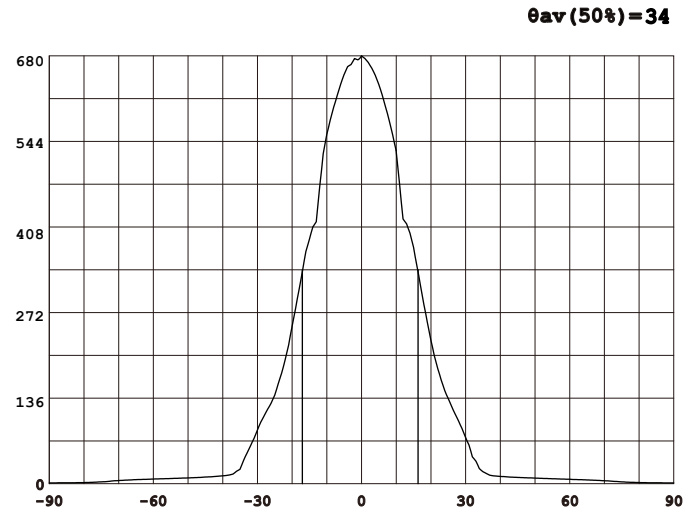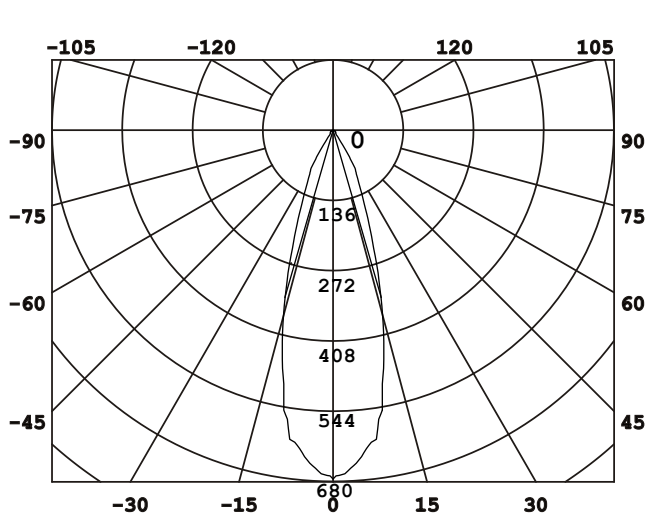

Belysningsstyrka | Illuminance (Unit: Lux)

| Avstånd | Belysningsstyrka | Spridnings vinkel 34° | Diam. |
|---------|---------------------|-----------------------|----------|
| 0.50m | 1878.02lx 2721.90lx | | 28.87cm |
| 1.00m | 469.50lx 680.48lx | | 57.74cm |
| 1.50m | 208.67lx 302.43lx | | 86.61cm |
| 2.00m | 117.38lx 170.12lx | | 115.47cm |
| 3.00m | 52.17lx 75.61lx | | 173.21cm |

Mått | Dimension

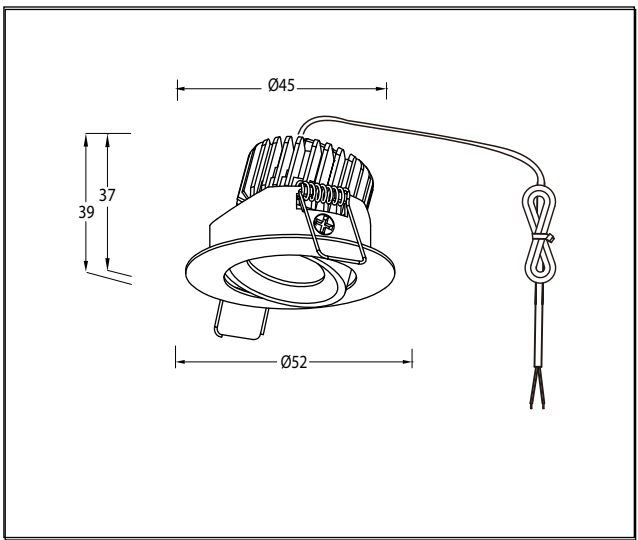

Avstånd Belysningsstyrka Spridnings vinkel 34° Diam.