

- 技术要求:
 1.严格按图纸打印
 2.CMYK彩色打印, A4纸.单面印刷
 3.如有问题, 请及时沟通






DESIGNLIGHT
SCANDINAVIAN AB

Art nr: PFC-68MW
E-nr: 74 691 83


Effekt Power	6.8W	Material Material	Aluminium	Färgtemperatur Color temperature	3000K	Armaturfärg Fixture color	White	Anslutning Connection	230V	Ljusflöde Luminous flux	604lm
--------------	------	-------------------	-----------	----------------------------------	-------	---------------------------	-------	-----------------------	------	-------------------------	-------

- CE, RoHS, IP CERTIFIED BY SGS**
- LED Driver 350mA LED 3.6V
 - IP20 IP44
 - LED 350mA LED 3.6V
 - Dimbar med 350 mA driver
 - 88 lm/w med lens, driver
 - 103 lm/w utan lens, driver
 - CRI Värdet > 85
 - Dimmable with 350mA driver
 - 88 lm/W with lens, driver
 - 103 lm/W without lens, driver
 - CRI value > 85

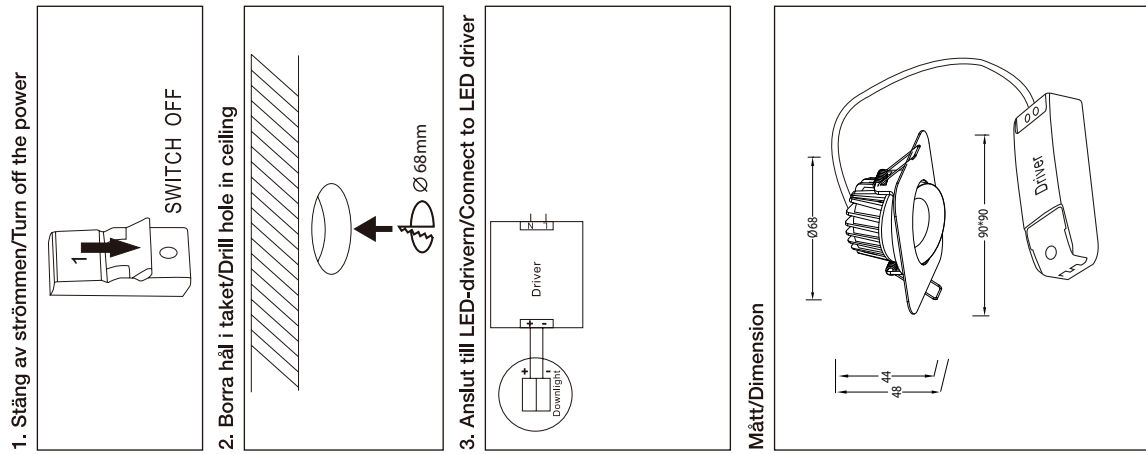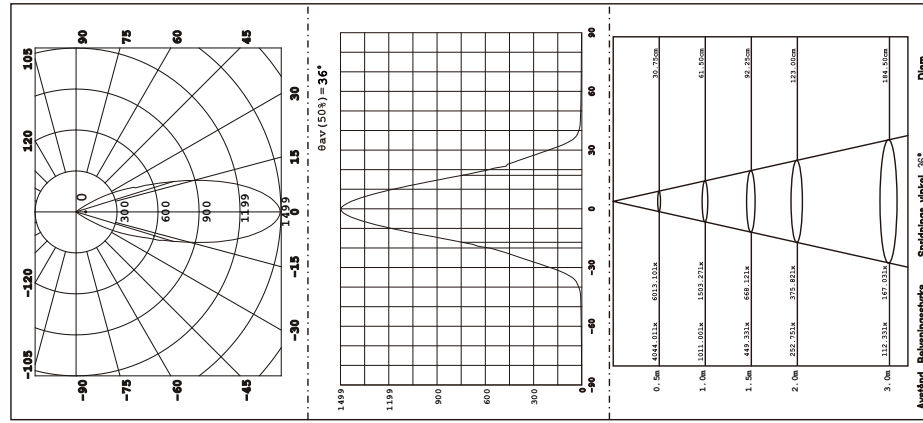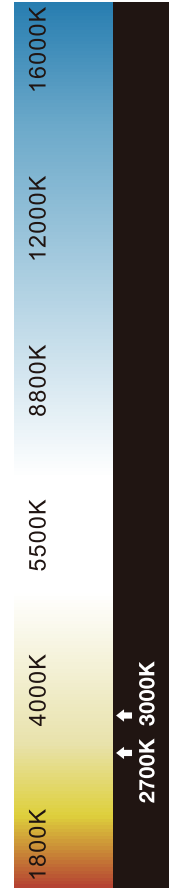

DESIGNLIGHT
SCANDINAVIAN AB

Designlight Scandinavian AB | Toffteivägen 1 | SE-342 60 Moheda
Kundcenter: Telefon 0472-716 10 | Fax 0472-716 09 | info@designlight.nu | www.designlight.nu

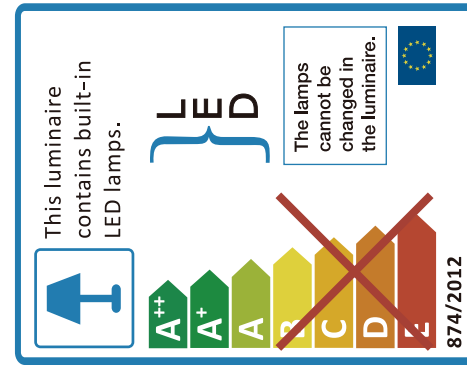

Kom ihåg vid montering av downlight LED

- Kontrollerat ALLTID diametern före hällgning i tak.
 Antal watt per lampa x antalet lampor ger storleken på transformator. Vid installation av LED följ ALLTID kopplingschema.
- ÖBS!** Det är olika transformatorer på LED och halogen.
 • 1-2W/kvm vid mjukare belysning normal takhöjd.
 • 3-4W/kvm vid allmän belysning normal takhöjd.
- LED är:**
- Miljövänliga och energisnåla.
 - Lång livslängd, 20.000-50.000 timmar.
 - Låg värmeutveckling, stötsäker.
- Trivs bäst i kyla, ju lägre temperatur och god luftcirkulation desto bättre ljuseffekt. För ökad livslängd på LED-lampor bör armaturer med kylfilas användas.
- Tråk på att **ALDRIG** montera downlight direkt mot lättbrännbara material. Om du vill ha en ljusstarkt uttryck i ditt utrymme, desto säkrare blir installationen. Överlåtare ger längre livslängd på ljusställa och armatur.
- Things to remember when installing LED downlights**
- ALWAYS** measure the diameter prior to perforation in ceiling. The amount of watt per lamp gives the number of lights that can be installed. Always follow the installation of LED. **ALWAYS** adhere to the circuit diagram.
- N.B.** Transformers differ for LED and halogen.
- 1-2W/square meter for softer lighting and standard ceiling height.
 - 3-4W/square meter for ambient lighting and standard ceiling height.
- LED IS:**
- Environmentally friendly and energy efficient.
 - Long life expectancy, 20 000-50 000 hours.
 - Low heat generation, shock resistant.
- LED lights perform at best in cold, the lower the temperature and the more air volume, the better the light output. For increased longevity on LED lights, fixtures with heat sinks should be used.
- Remember to **NEVER** install a downlight directly adjacent flammable materials. Sufficient air volume surrounding the installer fixture provides a safer installation. Increased air volume increases the expectancy for both light source and fixture.
- www.designlight.nu

REV 版本	Mark 标记	Description 修改内容	By 修改人	Date 日期

if no tolerance on it, see below. For important assembly size, tolerance will be noted in addition. 图中未标注公差尺寸以下的公差为准, 重要的配合尺寸另标公差				Product Name 产品名称		DII174客户说明书		东莞市达恩照明有限公司 Dongguan Diaman International Limited	
dimension range 尺寸范围	metal/plastic 五金/塑胶	dimension range 尺寸范围	glass/mood/casting/tube 玻璃/木器/铸铁/长管	Model No. 工厂型号	TC74056			Finish 表面处理	
>0 - 15	± 0.1	>0 - 15	± 0.5	Drawing By 设计				Part Name 物料名称	说明书
>15 - 50	± 0.15	>15 - 30	± 1	Check By 审核				Erp No. 物料编码	sm-174-0077
>50 - 100	± 0.25	>30 - 100	± 1.5	Approve By 核准	Sheet 页码	1 OF 1		Drawing No. 图号	SM5340
>100 - 200	± 0.4	>100	± 2		Rev. 版本	A0			
>200 - 400	± 0.6	thread & thickness according to standard 螺纹, 材料厚度按标准做							
>400	± 1	unit 单位	MM	Drawingsize 图纸尺寸	A4				