
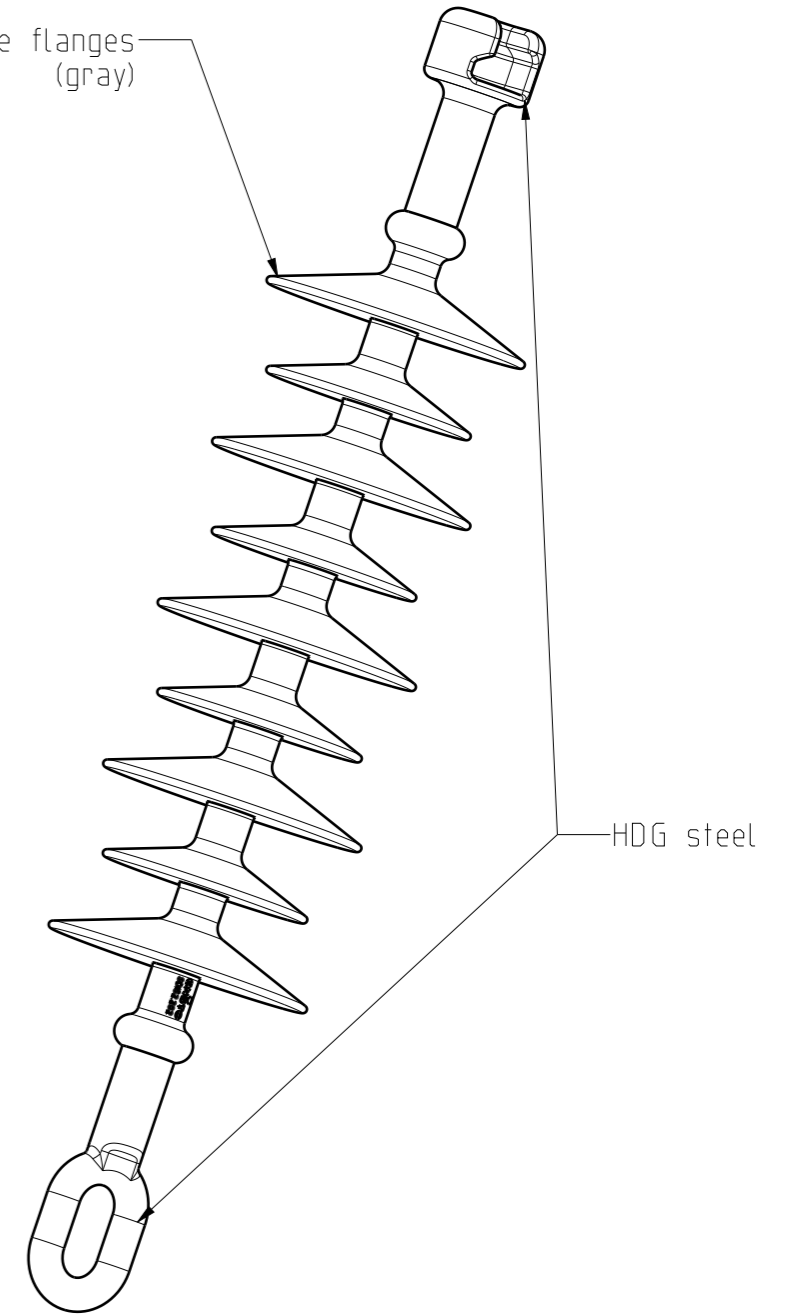


Silicone flanges (gray)



Product Specification	
Dimensions	
Section length	680 +/- 15mm
Electrical values	
Rated voltage	52 kV
Lightning impulse withstand voltage	250 kV
1 minute power frequency withstand voltage - wet	95 kV
Min. creepage distance	1280 mm
Mechanical	
Failure load (tensile)	120 kN
Standard: IEC 61109	

ENSTO Ensto Finland Oy Ensto DSO		
Scale	Date	29.03.21
1:4	By	KGa
A3	Checked	
Sheet No: 2 (2)	Ctrl	

Product specification sheet
Composite Line Post insulator
Eye socket, 52kV

Replaces:	
Replaced:	
Ref:	1878400 A
Code:	SD152.282