

TECHNICAL DATA SHEET

CABLE/ PIPE CLIPS WITH SCREW

tillex®


Plastmaterial: High impact elastic polypropylene - halogen free and UV-stabilized.
Screw: Strong concrete screw, Corrosion Class C4, PH2.
 Can be installed both indoors and outdoors.





INSTALLATION

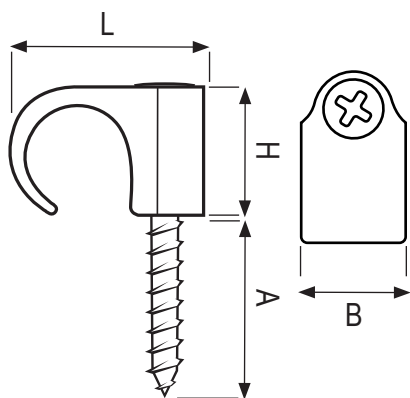

- For concrete and tile: screw directly into 4 mm hole - no plug required.
- For 13 mm single-layer plasterboard: mount using yellow plug (KP yellow).
- For double-layer plasterboard - no plug required. If screw "goes over", mount using yellow plug (KP yellow) in the created hole.
- For 13 mm single-layer plasterboard on metal profile - no plug required.
- For wood, fibreboard and plywood: screw directly into material.
- For aerated concrete: mount using yellow plug (KPyellow). For densities above 600, screw directly into concrete.

DIMENSIONS







PRODUCT RANGE (BOXES)

Ref. nr.	Type	 Screw T20	Colour	Dim.L, mm	Dim. B, mm	Dim. H, mm	Dim. A, mm	Pieces/box	Drill  \varnothing
180000	SC C4 7-10 W	5x33	white	16,9	10,5	9,3	22,0	100	4 mm
180017	SC C4 7-10 G	5x33	grey	16,9	10,5	9,3	22,0	100	4 mm
180024	SC C4 7-10 B	5x33	black	16,9	10,5	9,3	22,0	100	4 mm
180055	SC C4 8-12 W	5x33	white	17,4	10,6	10,2	21,0	100	4 mm
180062	SC C4 8-12 G	5x33	grey	17,4	10,6	10,2	21,0	100	4 mm
180079	SC C4 8-12 B	5x33	black	17,4	10,6	10,2	21,0	100	4 mm
180086	SC C4 10-14 W	5x40	white	19,5	12,0	13,0	18,0	100	4 mm
180093	SC C4 10-14 G	5x40	grey	19,5	12,0	13,0	18,0	100	4 mm
180109	SC C4 10-14 B	5x40	black	19,5	12,0	13,0	18,0	100	4 mm
180116	SC C4 14-18 W	5x40	white	23,7	14,1	16,6	21,8	100	4 mm
180123	SC C4 14-18 G	5x40	grey	23,7	14,1	16,6	21,8	100	4 mm
180130	SC C4 14-18 B	5x40	black	23,7	14,1	16,6	21,8	100	4 mm
180147	SC C4 18-22 W	5x45	white	27,5	14,4	21,3	21,7	50	4 mm
180154	SC C4 18-22 G	5x45	grey	27,5	14,4	21,3	21,7	50	4 mm
180161	SC C4 18-22 B	5x45	black	27,5	14,4	21,3	21,7	50	4 mm
180178	SC C4 22-26 W	5x45	white	31,3	14,5	24,3	20,0	50	4 mm
180185	SC C4 22-26 G	5x45	grey	31,3	14,5	24,3	20,0	50	4 mm
180192	SC C4 22-26 B	5x45	black	31,3	14,5	24,3	20,0	50	4 mm

Ref. nr.	Type		Colour	Dim. L, mm	Dim. B, mm	Dim. H, mm	Dim. A, mm	Pieces/box	Drill 
		Screw PH2							Drill \varnothing
170065	SC C4 7-10 W	5x33	white	16,9	10,5	9,3	22,0	100	4 mm
170070	SC C4 7-10 G	5x33	grey	16,9	10,5	9,3	22,0	100	4 mm
170075	SC C4 7-10 B	5x33	black	16,9	10,5	9,3	22,0	100	4 mm
170085	SC C4 8-12 W	5x33	white	17,4	10,6	10,2	21,0	100	4 mm
170090	SC C4 8-12 G	5x33	grey	17,4	10,6	10,2	21,0	100	4 mm
170095	SC C4 8-12 B	5x33	black	17,4	10,6	10,2	21,0	100	4 mm
170005	SC C4 10-14 W	5x40	white	19,5	12,0	13,0	18,0	100	4 mm
170010	SC C4 10-14 G	5x40	grey	19,5	12,0	13,0	18,0	100	4 mm
170015	SC C4 10-14 B	5x40	black	19,5	12,0	13,0	18,0	100	4 mm
170025	SC C4 14-18 W	5x40	white	23,7	14,1	16,6	21,8	100	4 mm
170030	SC C4 14-18 G	5x40	grey	23,7	14,1	16,6	21,8	100	4 mm
170035	SC C4 14-18 B	5x40	black	23,7	14,1	16,6	21,8	100	4 mm
170045	SC C4 18-22 W	5x45	white	27,5	14,4	21,3	21,7	50	4 mm
170050	SC C4 18-22 G	5x45	grey	27,5	14,4	21,3	21,7	50	4 mm
170055	SC C4 18-22 B	5x45	black	27,5	14,4	21,3	21,7	50	4 mm
170100	SC C4 22-26 W	5x45	white	31,3	14,5	24,3	20,0	50	4 mm
170105	SC C4 22-26 G	5x45	grey	31,3	14,5	24,3	20,0	50	4 mm
170110	SC C4 22-26 B	5x45	black	31,3	14,5	24,3	20,0	50	4 mm

PRODUCT RANGE (XXL BUCKET)

Ref. nr.	Type		Colour	Dim. L, mm	Dim. B, mm	Dim. H, mm	Dim. A, mm	Pieces/box	Drill 
		Screw PH2							Drill \varnothing
170117	SC C4 14-18 W	5x40	white	23,7	14,1	16,6	21,8	1500	4 mm
170131	SC C4 14-18 G	5x40	grey	23,7	14,1	16,6	21,8	1500	4 mm
170216	SC C4 18-22 W	5x45	white	27,5	14,4	21,3	21,7	1000	4 mm
170254	SC C4 18-22 G	5x45	grey	27,5	14,4	21,3	21,7	1000	4 mm

Ref. nr.	Type		Colour	Dim. L, mm	Dim. B, mm	Dim. H, mm	Dim. A, mm	Pieces/box	Drill 
		Screw T20							Drill \varnothing
180215	SC C4 14-18 W	5x40	white	23,7	14,1	16,6	21,8	1500	4 mm
180222	SC C4 14-18 G	5x40	grey	23,7	14,1	16,6	21,8	1500	4 mm
180246	SC C4 18-22 W	5x45	white	27,5	14,4	21,3	21,7	1000	4 mm
180253	SC C4 18-22 G	5x45	grey	27,5	14,4	21,3	21,7	1000	4 mm